1.ELECTRICAL PERFORMANCE

1—1.CURRENT RATING:1.


2.MECHANICAL PERFORMANCE

2—1.INSERTION FORCE—MODULE TO CONNECTOR:1.15N MAX PER PAIR;


2—2.DURABILITY:50 CYCLES;

TO LEADING EDGE OF PAD FOR

UTTING BURRS.

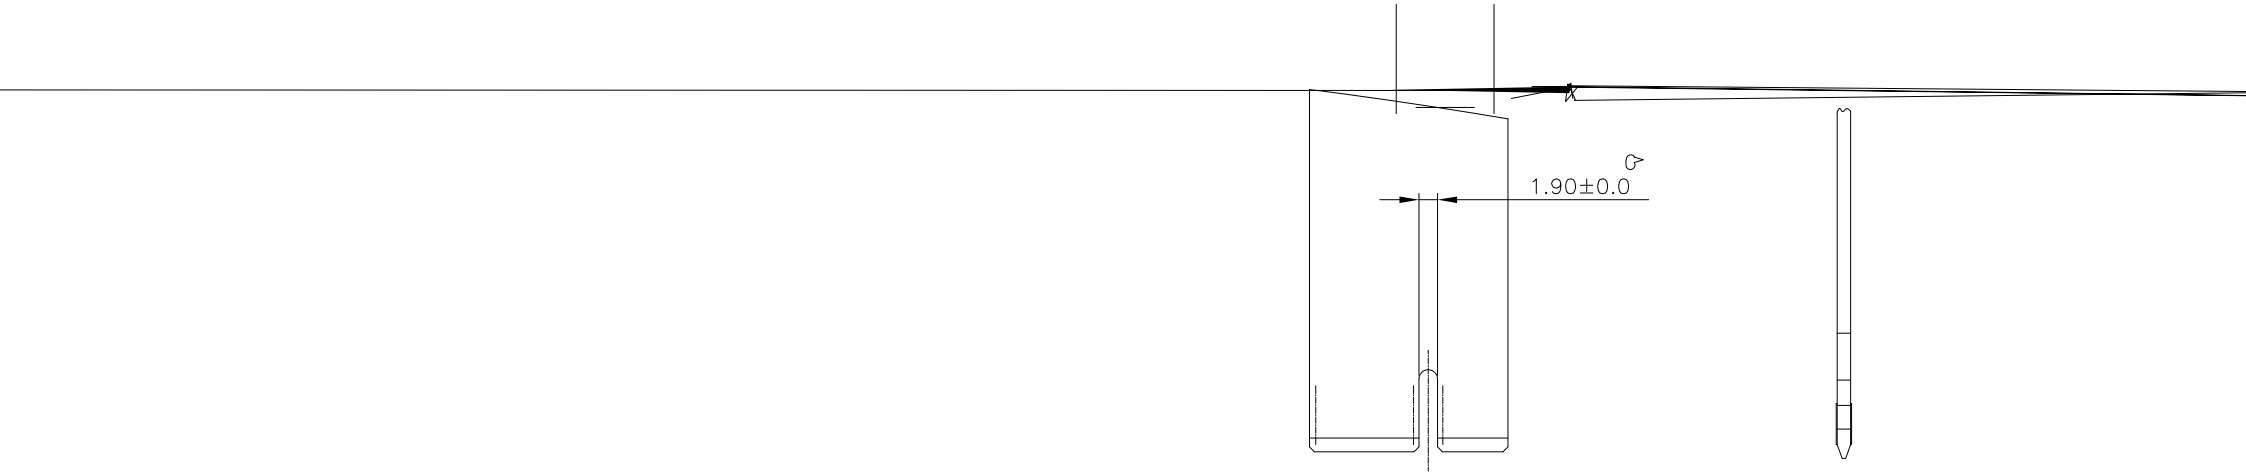

PRIMARY (COMPONENT) SIDE



SECONDARY (SOLDER) SIDE

RECOMMENDED CARD EDGE FINGER

DEFAULT TOLERANCE ±0.05

NOTES:

HF

TABLE

NO.	PART NO.	SPECIFICATION	
1		HOUSING_PA10T BLACK UL94-V0,CONTACT_C5191 Au 15u" Sn100u",HOOK_S50C Sn	HF COMPLIANT